





Enviro  **STIX**
ADHESIVE SYSTEMS
ENVIROSTIX™ CLASSIC

**THINK OUTSIDE
THE BUCKET!**

ENVIROSTIX - HIGH PERFORMANCE ADHESIVE
SYSTEMS FOR COMMERCIAL FLOORING

INSTALLATION & TECHNICAL SPECIFICATIONS

(See full tech sheets online for further details.)

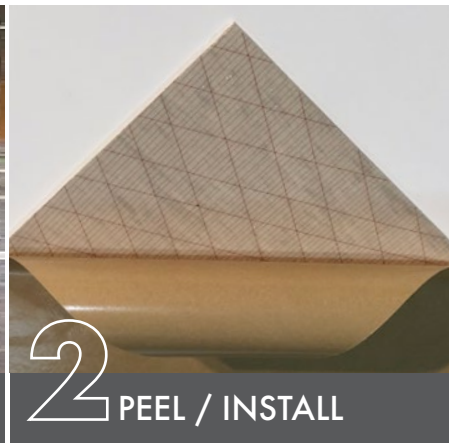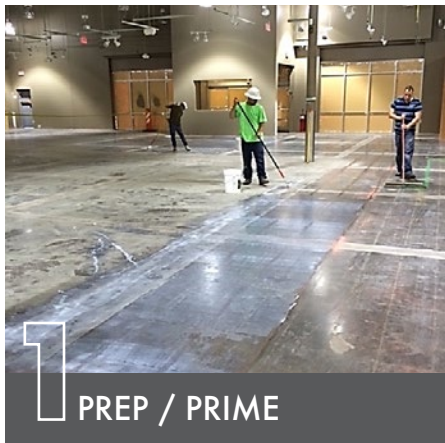

Properties	ES-P (EnviroSTIX™ Primer)	EnviroSTIX™ Adhesive
Base	Solvent-Free, Acrylic	Solvent-Free, Acrylic Dispersion
Form	Fluid	Solid
Color	Light Blue	Clear
Cure Time	30-40 Minutes per Coat	Pre-Cured Immediate Access
Install Temp Range	60° to 75° F (Flooring Manufacturer's recommendations supersede EnviroSTIX™ Classic recommendations.)	45° to 90° F (Flooring Manufacturer's recommendations supersede EnviroSTIX™ Classic recommendations.)
VOC Content	0 g/l (Out of 50 g/l Allowable)	0 g/l (Out of 50 g/l Allowable)
Water Solubility	Fully Miscible	Negligible
Surface PH Range	Neutralizes the PH.	7-14 PH — No limit when used in combination with the ES-P.
Sheet Goods & Modular Attic Stock Shelf Life	6-Months Unopened Container at 70° F or 21° C. or 30 Days Opened Container at 70° F or 21° C.	10-Year Limited Warranty (Flooring Manufacturer's recommendations on storage, temperature, and shelf life supersede EnviroSTIX™ Classic recommendations.)
Coverage	300 sf/ ½ gal, 600 sf/ 1 gal, or 3000 sf/ 5-gal unit. (Spread rate will vary due to job site conditions.)	Full even uniform spread on the backing of the flooring material.
Warranty	10-Year Limited	10-Year Limited



137 Lower Dug Gap Road SW, Dalton, Ga 30720

1-888-428-3106 | info@baseking.com | www.baseking.com

by **BASE KING**

U.S. Patent Nos. 9,409,344, 9,517,587, 10,081,742. Other U.S. & Canadian patents pending.

ENVIROSTIX™ CLASSIC ADHESIVE SYSTEM

The EnviroSTIX™ Classic System includes the quick drying ES-P (EnviroSTIX™ Primer) combined with the pre-cured EnviroSTIX™ Adhesive.

FEATURES:

- Pre-mixed PH neutralizing primer
- Easy peel and bond adhesive installation
- Immediate access installations.
- Cost effective alternative to moisture mitigation
- Machine applied adhesive with uniform coverage
- Relative humidity protection performing on projects up to 95% RH.



ENVIROSTIX™ PRIMER (ES-P)

- 1-part, ready-to-use, solvent-free, VOC-free, acrylic primer
- Used to pre-treat the floors prior to the installation of EnviroSTIX™ on porous and non-porous substrates.
- Alkali resistant primer that neutralizes the PH of the substrates surface, binds residual dust while improving bonding properties.
- Quick Dry Time/Same-day Installation: 30-40 minutes per coat (Dry time will vary based on the job site conditions, porosity and humidity will play a major role.
- Shelf Life: 30 days opened container or 6-months unopened container from the factory date stored not below 41° F.

Unit Size: ½ gal, 1 gal, & 5 gal units

ENVIROSTIX™ ADHESIVE (ES)

EnviroSTIX™ is a pre-cured, moisture resistant, virtually VOC free, poly-acrylic adhesive. It is machine applied directly to the back of commercial grade flooring materials with a patented process at the Base King facility in Dalton, GA. When the materials arrive to the job site, they can quickly be installed (after acclimation) with an easy peel-and-bond application. EnviroSTIX™ can be installed over existing flooring for ease of remodeling, when existing material is in good condition.

PROVEN

PATENTED

INNOVATIVE

FAST

CLEAN

ECONOMICAL

FLOORING MATERIAL APPLICATIONS:

This system works with most major commercial flooring manufacturers' product lines.


EnviroSTIX™ adhesive can be applied to carpet tiles, rubber tiles, VCT, LVT, sheet goods, and much more. (See your sales associate with questions about specific flooring options.)

PROJECTS:


EnviroSTIX™ is a proven, successful product with millions of square feet installed on projects throughout the US & Canada. Please see our website for a list of projects. EnviroSTIX™ is mostly used in the commercial flooring industry on healthcare, education, government, & retail projects.

WARRANTY:

EnviroSTIX™ Classic has a 10-year limited warranty on properly installed projects.

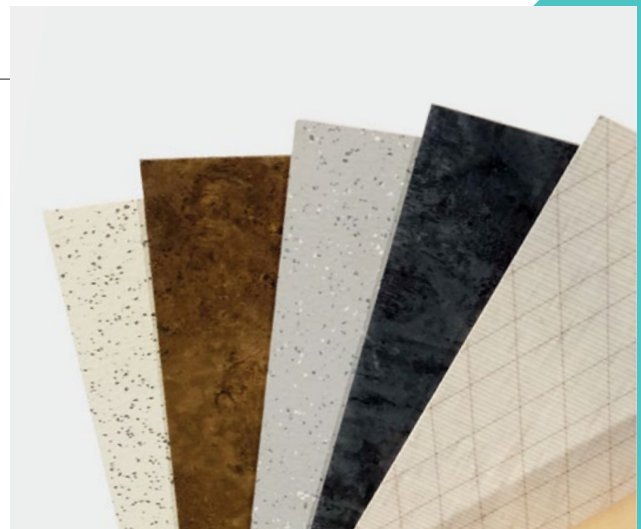

"ENVIROSTIX™ ADHESIVE SYSTEMS
are some of the most cost effective,
high performance flooring
products available
on the market."

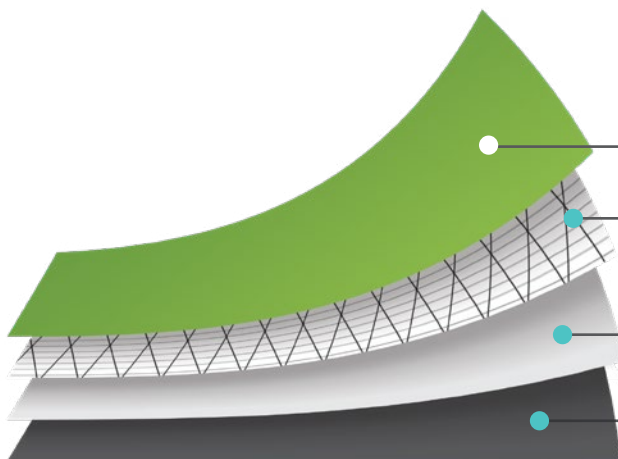

APPLICATION:

- 4 Flooring Materials
- 3 EnviroStix™ Adhesive (Acrylic Dispersion with Integrated polyester scrim)
- 2 ES-P (EnviroStix™ Primer)
- 1 Substrate